



Carbon Monoxide Detector Fire Detector

FCO

Dec.10



FCO Display



FCO Wall



FCO Duct



Features

- Continuous monitoring
- Low zero point drift
- Good stability to poisoning
- Long life sensor
- Modular plug-in technology
- Easy maintenance/calibration
- Manual addressing for RS485 mode (option)
- 4-20mA analog input for external transmitter
- 4-20mA loop-powered or 2-10Vdc output signal
- Relay output
- Duct mounting
- Integrated heating for less degree than specified operating range

Technical Data

Gas	Carbon Monoxide
Detection principle	Electrochemical, diffusion
Stability & resolution	+/- 3ppm
Repeatability	+/- 3% of reading
Long term output drift	<5% signal loss/year
Response time	t90 <50 sec.
Storage time	6 months
Mounting height	1,5 to 1,8 metres above floor
Output signal selectable	
(0)4-20mA	load < 500ohm overload
(0)2-10Vdc	load < 50kohm overload
Starting point	0/20% prportional, overload and short-circuit proof
Relay Output	
Relay 1	30Vac/dc, 0,5A, pot.free SPDT
Relay 2	Dito SPNO/SPNC
Power Cons.	30mA, (0,8VA)
Serial interface	RS485/19200Baud 9600 Modb us
Power supply	18-28Vac/dc (reverse polarity prot.)
Power consumption	22mA, max (0,6VA)
Expected lifetime	5 years, normal operating envirom.
Humidity range	
Continuous	15-90% rH non-condensing
Short time	0-95%RH non-condensing
Operating range	
Continuous	-10 up to +50C
Short-time	-20 up tp +50C
Rating	IP65 Protection Class
Pressure range	Atmospheric +/-10%

Application

For detection of carbon monoxide (CO) within a wide range of fire detection applications.

Due to the standard analogue signal the CO transmitter is compatible to any electronic analogue control, DDC/PLC control or automation system.

Ordering Codes

Manual calibration via potentiometer

FCO 050 0-50ppm 4-20mA/2-10Vdc

Calibration and adressing by service Tool

FCO 050T 0-50ppm 4-20mA/2-10Vdc

MOD	Protocol for Modbus
CUST	Protocol for customers specifications
GCD	Protocol for GCD-series
REL CO	Relay pack see below
DUCT	Duct Mounting
LCD	Two lines, 16 characters each
CAL 2	Calibration Kit for Tox-transmitters
HEAT	Temp.controlled heating element 3C +/-2C0,3VA
BUZZ	Internal warning summer 85dB
STAIN	Enclosure of stainless steel
SERV	Service Tool with Keyapad and LCD-display
AIN	4-20mA analogue input
GAS 17	Calibration gas 17 liter
REG	Pressure regulator flow adjusted to 0,5 lit/min.


Warning devices See special datasheet

Warning signs See special datasheet


Cross sensitivity*	Concentration (ppm)	Reaction (ppm)
Acetone, C ₃ H ₆ O	1000	0
Acetylene, C ₂ H ₂	40	80
Ammonia, NH ₃	100	0
Carbon dioxide, CO ₂	5000	0
Chlorine, Cl ₂	2	0
Ethanol, C ₂ H ₅ OH	2000	5
Hydrogen, H ₂	100	20
Hydrogen Sulphide, H ₂ S	25	0
Iso Propanol, C ₃ H ₈ O	200	0
Nitric oxide, NO	50	8
Nitrogen dioxide, NO ₂	50	-1,0
Sulphur dioxide, SO ₂	50	< 0,5

Relay Package

With the FCO relay package two potential-free contacts are available for the connection to external devices. The switching thresholds of these relays are selectable via potentiometer in the range of 10 - 90% of CO concentration. The hysteresis is programmable via jumpers. Additionally the relay mode, open-circuit or closed circuit, is selectable. The status of the two relays is displayed via LED.

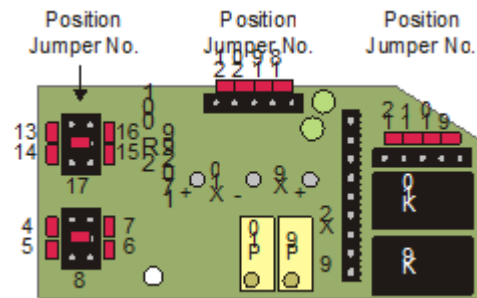

Connecting Diagram

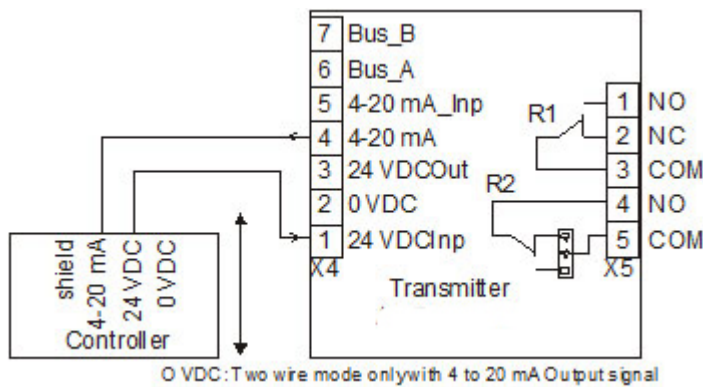

The two relays are activated in dependence of the gas concentration. If the gas concentration exceeds the adjusted alarm threshold, the corresponding relay switches on.

If the gas concentration falls below the threshold minus hysteresis, the relay switches off again.

The contact function for relay 2, NC (normally closed) or

NO (normally open), can be selected via the jumper NO/NC.

See fig 1 and 3. Relay 1 is equipped with a change-over contact.

Via the ModBus interface the two alarm thresholds and hysteresis are freely adjustable at the PC within measuring range.

The procedure can be read from the user manual "ModBus Software".

The following parameters are factory-set.

Alarm threshold 1 = Relay 1: 10 ppm

Alarm threshold 2 = Relay 2: 20 ppm

Switching hysteresis: 3 ppm